

REV	DESCRIPTION	MARK
XI	First edition	

SPECIFICATIONS


- Voltage rating: 250V AC,DC
- Current rating: 7A,AC,DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ/min
- Temperature range: -25°C - +85°C
- Applicable PC board thickness:0.063 (1.6mm)
- Contact resistance:Initial Voice/10ma max
After environmental
Texting /20ma max

WAFER

- Material: Nylon 66, UL94V-0
Brass Tin-Plating

NO	DIMENSION (mm)		
	A	B	C
1	3.96	8.00	5.18
2	3.96	8.00	5.18
3	7.92	11.96	9.14
4	11.88	15.92	13.10
5	15.84	19.88	17.06
6	19.80	23.84	21.02
7	23.76	27.80	24.98
8	27.72	31.76	28.94
9	31.68	35.72	32.90
10	35.64	39.68	36.86
11	39.60	43.64	40.82
12	43.56	47.60	44.78

SECTION A-A

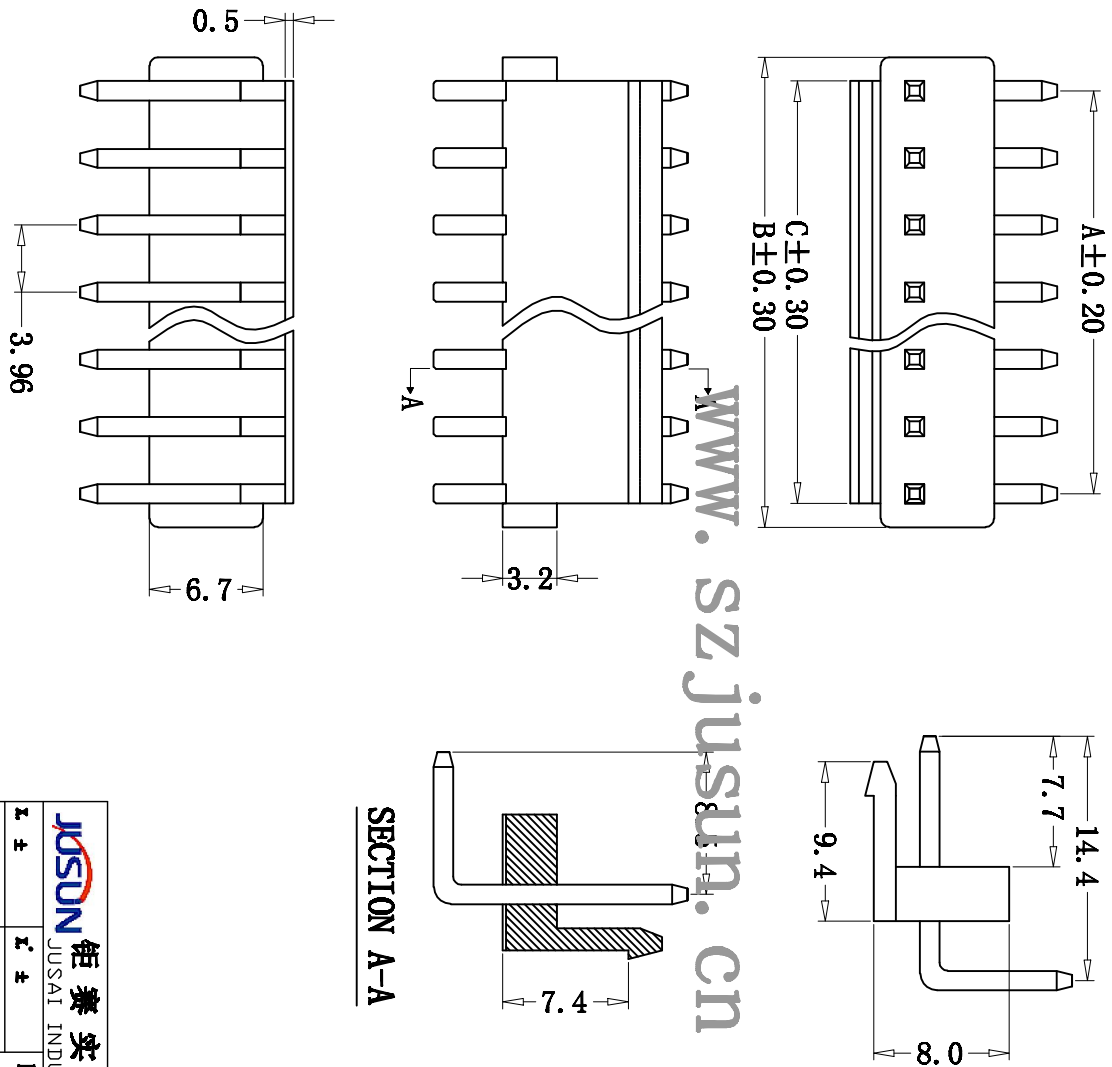

www.szjusun.cn

		钜赛实业(深圳)有限公司 JUSUN INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: VH-PAW	
USE: MAT'L	APPD: FINISH	PART NO.:	SCALE: 1:1	SHEET: 1/1	REV.: XI
CHEKD:	DR:	DWG NO.:			
UNITS: mm	Q'TY				