
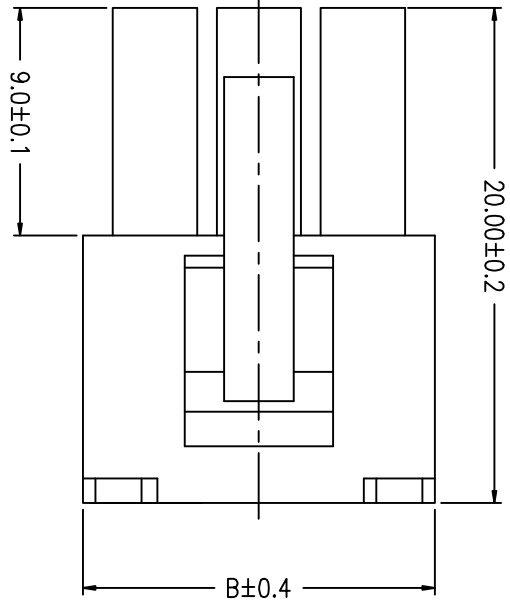



REV	DESCRIPTION	MARK
X1	First edition	

技术参数 SPECIFICATIONS

- ◆ 间距: 4.2 Pitch: 4.2
- ◆ 适用线规: AWG#28-#22
Applicable Wire: AWG#28-#22
- ◆ 额定电压: AC,DC,250V(有效值)
Voltage rating: AC,DC,250V(rms)
- ◆ 额定电流: 5.0A
Current rating: 5.0A
- ◆ 耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆ 工作温度: -25 C~+85 C
Working Temperature: -25 C~+85 C
- ◆ 绝缘电阻: >1000 MΩ
Insulation resistance: >1000MΩ
- ◆ 接触电阻: < 0.015 Ω
Contact resistance: < 0.015 Ω

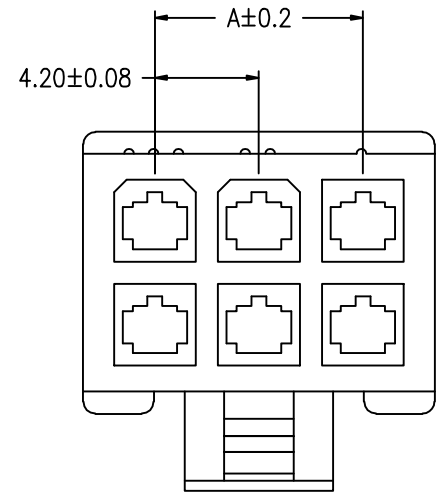

Poles	DIMENSION	
	A	B
2*3	8.4	13.8
2*4	12.6	18.0
2*5	16.8	22.2
2*6	21.0	26.4
2*7	25.2	30.6
2*8	29.4	34.8
2*9	33.6	39.0
2*10	37.8	43.2
2*11	42.0	47.4
2*12	46.2	51.6

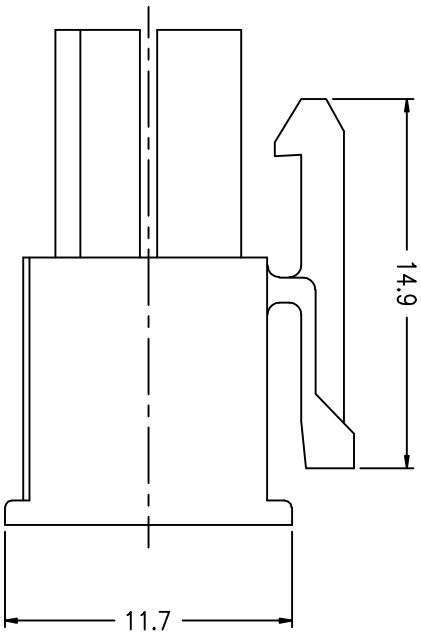

材料 MATERIAL

- ◆ 绝缘座: 尼龙 UL94-0
Housing: Nylon UL94-0
- ◆ 端子: 磷青铜
Terminal: Phosphor bronze

www.szjusun.cn

JUSUN 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

PART NO.: 5567-1Y(公壳)
CUS PART NO.:

APPD: MATL: FINISH: CHKD: DATE: 2016.03.20 VERSION: V1.0

SCALE: 1:1 SHEET: 1/1 REV: X1

X ±	X ± 0.1	X ± 0.1	X ± 0.1	UNIT: mm
XX ± 0.05	XX ± 0.05	XX ± 0.05	XX ± 0.05	UNIT: mm
XXX ±	XXX ±	XXX ±	XXX ±	UNIT: mm