
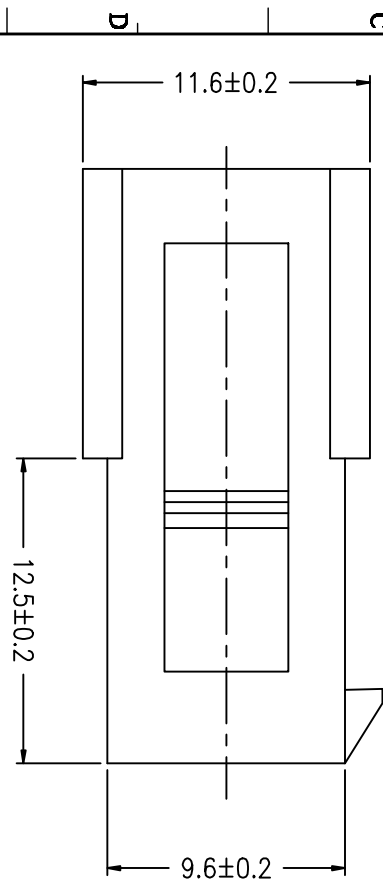


REV	DESCRIPTION	MARK
X1	First edition	

技术参数 SPECIFICATIONS

- ◆ 间距: 4.2 Pitch: 4.2
- ◆ 适用线规: AWG#28-#22
Applicable Wire: AWG#28-#22
- ◆ 额定电压: AC/DC 250V(有效值)
Voltage rating: AC/DC 250V(rms)
- ◆ 额定电流: 5.0A
Current rating: 5.0A
- ◆ 耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆ 工作温度: -25 C~+85 C
Working Temperature: -25 C~+85 C
- ◆ 绝缘电阻: >1000 MΩ
Insulation resistance: >1000MΩ
- ◆ 接触电阻: < 0.015 Ω
Contact resistance: < 0.015 Ω

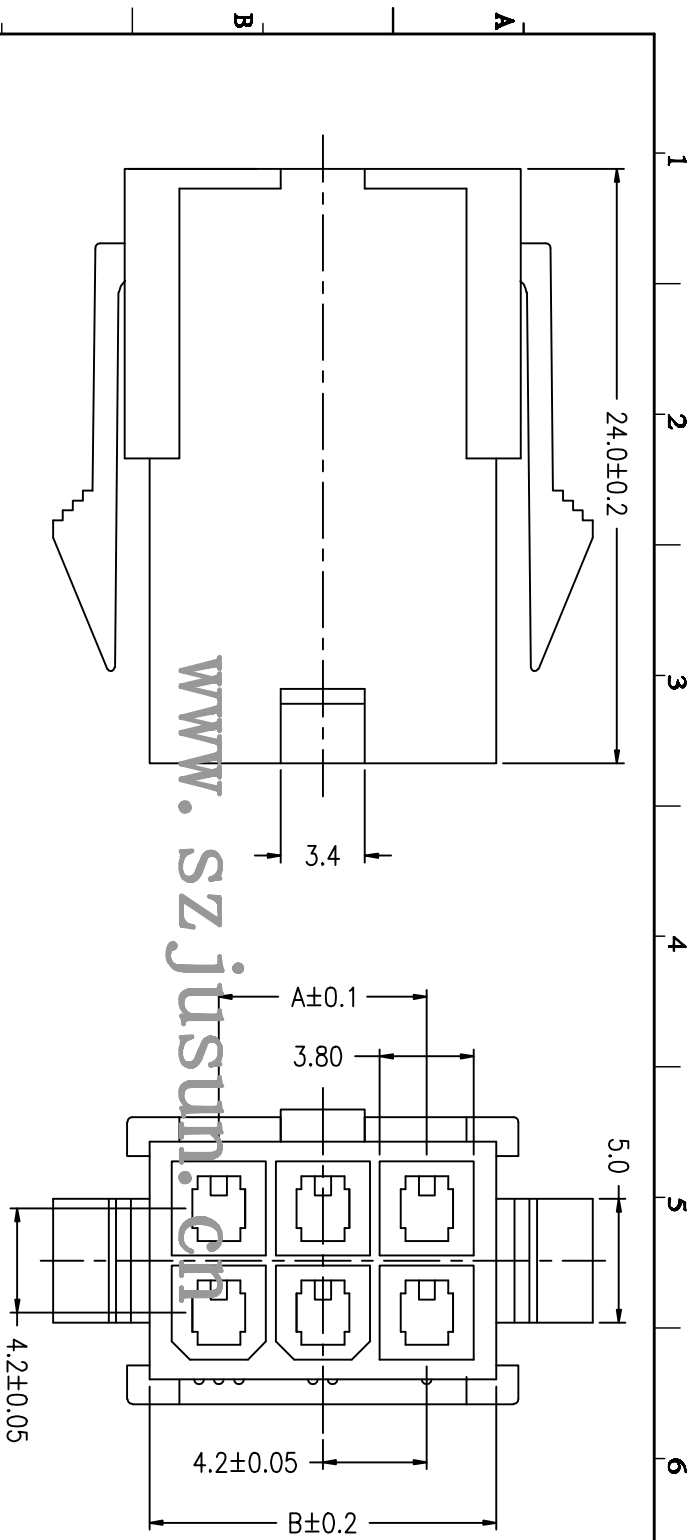

Poles	DIMENSION	
	A	B
2	0	5.6
4	4.2	9.8
6	8.4	14.0
8	12.6	18.2
10	16.8	22.4
12	21.0	26.6
14	25.2	30.5
16	29.4	35.0
18	33.6	39.0
20	37.8	43.4
22	42.0	47.6
24	46.2	51.8

材料 MATERIAL

- ◆ 绝缘座: 尼龙 UL94-0
Housing: Nylon UL94-0
- ◆ 端子: 磷青铜
Terminal: Phosphor bronze

JUSUN 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

PART NO.: 5557-1Y(母壳)
CUS PART NO.:

APPD: MATL: FINISH: CHKD: DATE: 2016.03.20 VERSION: V1.0

SCALE: 1:1 SHEET: 1/1 REV: X1

QTY: DR: