
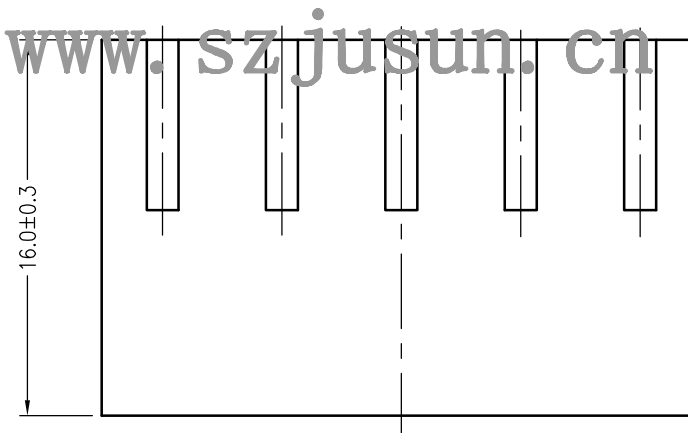
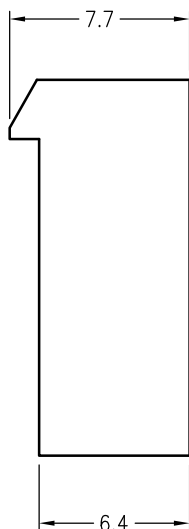


Poles	DIM.A	DIM.B
2P	5.08	10.16
3P	10.16	15.24
4P	15.24	20.32
5P	20.32	25.40
6P	25.40	30.48
7P	30.48	35.56
8P	35.56	40.64
9P	40.64	45.72
10P	45.72	50.80
11P	50.80	55.88
12P	55.88	60.96

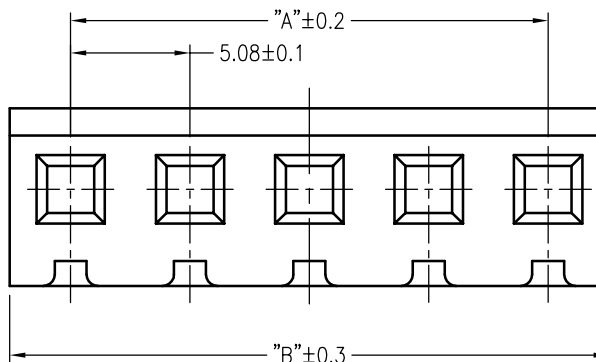


■ 技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#18~#24  
Applicable Wire: AWG#18~#24
- ◆ 额定电压: 250V DC/AC(rms)  
Rated voltage: 250V DC/AC(rms)
- ◆ 额定电流: 5A  
Rated Current: 5A
- ◆ 耐压值: 500V AC/minute  
Withstand voltage: 500V AC/min.
- ◆ 工作温度: -25°C ~ +120°C  
Working Temp : -25°C ~ +120°C
- ◆ 绝缘电阻: ≥1000 MΩ  
Insulation resistance: ≥1000 MΩ
- ◆ 接触电阻: ≤10 mΩ  
Contact resistance: ≤10 mΩ

■ 材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94-V2  
Insulator: PA66, UL94-V2

 <b>炬赛实业(深圳)有限公司</b> JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD	GENERAL TOLERANCE		SCALE: 3:1	DRAWN:	DATE:	DOC. NO: JD-Y-E077	TITLE: 工程图	REV. A
	XX. ±0.40		UNIT: mm	CHECK:	DATE:			PARTS NO: 5.08-NY
	X. ±0.30		SIZE: A4	APPROVE:	DATE:			
	.X ±0.25	X.* ± 2°						
.XX ±0.15	.X.* ± 1°							