
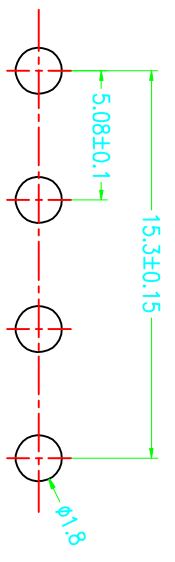
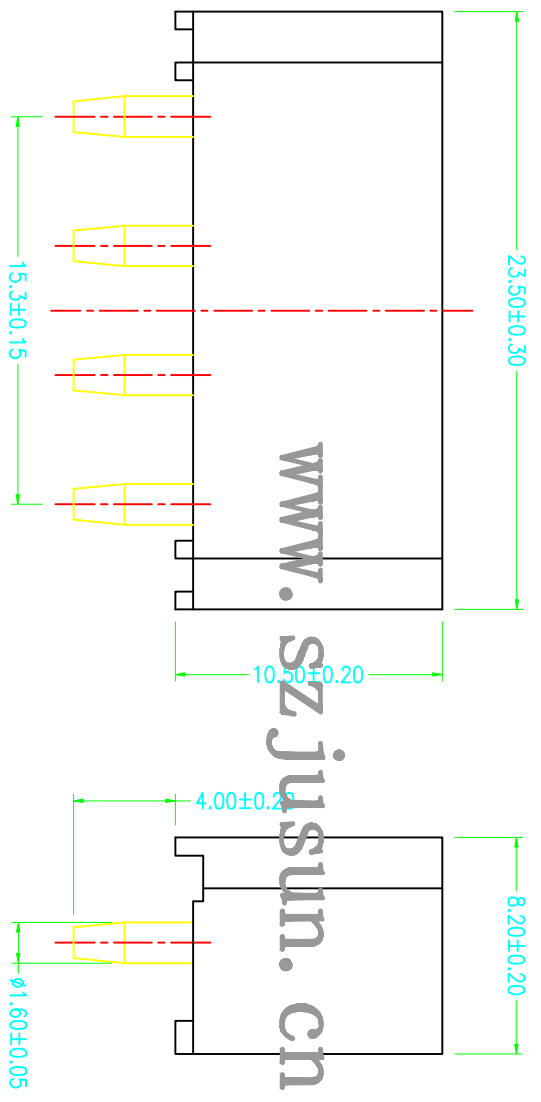


REV	DESCRIPTION	DATE
XI	First edition	

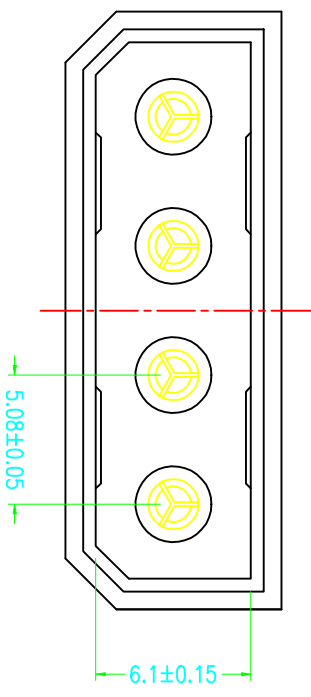

P.C.B LAYOUT

www.szjusun.cn

技术参数 SPECIFICATIONS

- ◆ 间距: 5.08 Pitch: 5.08
 - ◆ 板载: 4 Poles: 4
 - ◆ 额定电压: AC, DC, 250V (250HZ有效值)
 - ◆ Voltage rating: AC, DC, 250V (250HZ)
 - ◆ 额定电流: 5.0A, AC, DC
 - ◆ Current rating: 5.0A, AC, DC
 - ◆ 耐压值: 1500V AC/minute
 - ◆ Withstand voltage: 1500V AC/minute
 - ◆ 工作温度: -25 °C~+85 °C
 - ◆ Working Temperature: -25 °C~+85 °C
 - ◆ 绝缘电阻: > 1000 MΩ
 - ◆ Insulation resistance: > 1000 MΩ
 - ◆ 接触电阻: < 0.02 Ω
 - ◆ Contact resistance: < 0.02 Ω
 - ◆ 适用印制板厚度: 1.6mm
 - ◆ Applicable PC board thickness: 1.6mm
- 材料 MATERIAL
- ◆ 接插件: 磷青铜 (Phosphor bronze)
 - ◆ 塑胶本体: 尼龙, UL 94V-0
- 包装方式 PACKAGE
- ◆ 袋装 Bag Package

钰赛实业(深圳)有限公司 JUSUN INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: 大四P-4A PART NO.:	
USE: .I ± 0.30 .X ± 0.30 .XX ±	FINISH .I ± .X ± .XX ±	APPD: .I ± .X ± .XX ±	DWG NO.:
DR:	QTY	CHEK:	SCALE 1:1
UNIT: mm		REV. XI	