


www.szjusun.cn

技术参数 SPECIFICATIONS

- ◆ 间距: 6.2 Pitch: 6.2
- ◆ 適用線規: AWG#24-#14
Applicable Wire: AWG#24-#14
- ◆ 额定电压: AC,DC,300V(有效值)
Voltage rating: AC,DC,300V(rms)
- ◆ 额定电流: 10.0A
Current rating: 10.0A
- ◆ 耐压值: 1500V AC/minute
Withstand voltage: 1500V AC/minute
- ◆ 工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
- ◆ 绝缘电阻: $\geq 1000 \text{ ohM}$
Insulation resistance: $\geq 1000 \text{ ohM}$
- ◆ 接触电阻: $\leq 0.02 \text{ oh}$
Contact resistance: $\leq 0.02 \text{ oh}$

材料 MATERIAL

- ◆ 絕緣座: 尼龍 UL94-0
Housing: Nylon UL94-0
- ◆ 端子: 磷青銅
Terminal: Phosphor bronze

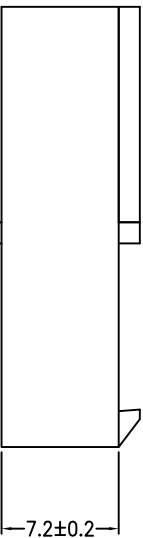

Poles	Part No	Dimensions(mm)	
		A	B
2	L6.2-2A	6.2	13.3
3	L6.2-3A	12.4	19.5

		GENERAL TOLERANCE		SCALE		DRAWN		DATE		DWG. NO.		TITLE		REV.	
		XX. ± 0.40	XXX. ±	UNIT	1 = 1	CHECK		DATE		G:\DWG\Production\L6.2-nA		塑膠图	A		
X. ± 0.25	.XXX ±	SIZE	MM	APPROVE		DATE		PARTS NO.	L6.2-nA			SHEET			
.XX ± 0.15	X' ± 2'	A4										1/1			
.XX ± 0.10	X' ± 1'														

恒泰实业(深圳)有限公司
JUSUN INDUSTRIAL (SHENZHEN) CO.,LTD