
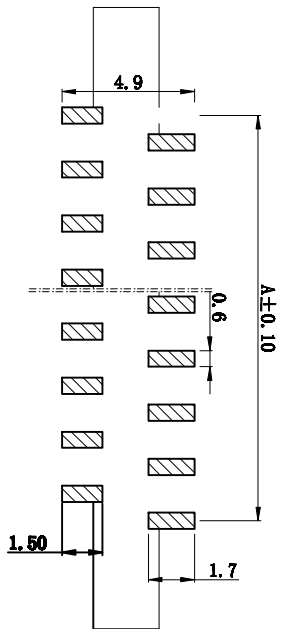
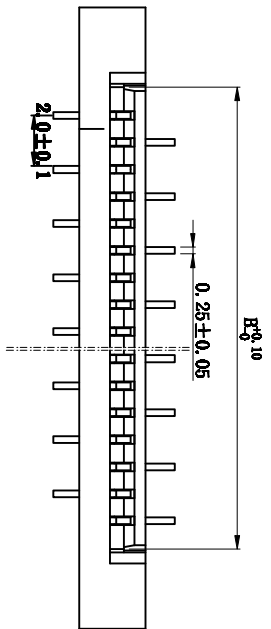
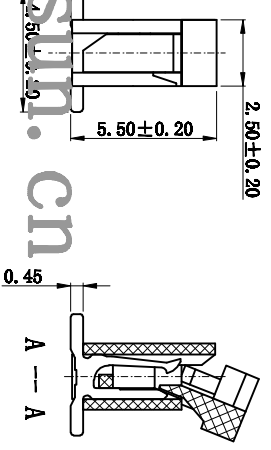


REV	DESCRIPTION	MARK
X1	First edition	

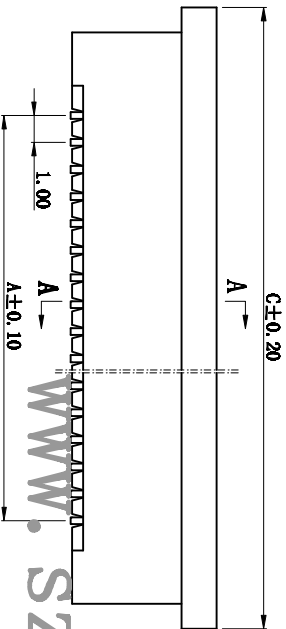

PCB Layout

**性能:**  
 额定电流: 0.5A  
 额定电压: 50V  
 耐电压: 500V  
 接触电阻: 30mΩ;  
 绝缘电阻: 500MΩ;  
 工作温度: -20℃~85℃.

**材质:**  
 镀条: LCP, UL94V-0  
 基板: LCP, UL94V-0  
 插簧: 磷青铜, 镀镍

**PEC管理规定:**  
 1、禁止使用含有SS-00259所限制的物质。  
 2、对应的SSSS或ITS出具的ICP-AES数据, 不可测定物质的成分表, 在一年有效期内。

孔位	A	B	C
4	3.00	5.10	11.00
5	4.00	6.10	12.00
6	5.00	7.10	13.00
7	6.00	8.10	14.00
8	7.00	9.10	15.00
9	8.00	10.10	16.00
10	9.00	11.10	17.00
11	10.00	12.10	18.00
12	11.00	13.10	19.00
13	12.00	14.10	20.00
14	13.00	15.10	21.00
15	14.00	16.10	22.00
16	15.00	17.10	23.00
17	16.00	18.10	24.00
18	17.00	19.10	25.00
19	18.00	20.10	26.00
20	19.00	21.10	27.00
21	20.00	22.10	28.00
22	21.00	23.10	29.00
23	22.00	24.10	30.00
24	23.00	25.10	31.00
25	24.00	26.10	32.00
26	25.00	27.10	33.00
27	26.00	28.10	34.00
28	27.00	29.10	35.00
29	28.00	30.10	36.00
30	29.00	31.10	37.00
31	30.00	32.10	38.00
32	31.00	33.10	39.00
33	32.00	34.10	40.00
34	33.00	35.10	41.00
35	34.00	36.10	42.00

**JUSUN** 巨赛实业(深圳)有限公司  
 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

PART NO.: 1.0S-12-nPB

DWG NO.:

L ±	L' ±	MAT'L	APPD:	DATE	VERSION
.I ± 0.1	.I' ± 0.1'	FINISH	CHKD:	2017.03.29	V1.0
.X ± 0.05	.X' ± 0.05'		DR:	SCALE 1:1	SHEET 1/1
.XX ±	.XX' ±	Q'TY		REV. X1	
UNIT: mm					