



REV	DESCRIPTION	MARK
XI	first edition	

孔位	A	B	C
4	3.00	5.10	11.00
5	4.00	6.10	12.00
6	5.00	7.10	13.00
7	6.00	8.10	14.00
8	7.00	9.10	15.00
9	8.00	10.10	16.00
10	9.00	11.10	17.00
11	10.00	12.10	18.00
12	11.00	13.10	19.00
13	12.00	14.10	20.00
14	13.00	15.10	21.00
15	14.00	16.10	22.00
16	15.00	17.10	23.00
17	16.00	18.10	24.00
18	17.00	19.10	25.00
19	18.00	20.10	26.00
20	19.00	21.10	27.00
21	20.00	22.10	28.00
22	21.00	23.10	29.00
23	22.00	24.10	30.00
24	23.00	25.10	31.00
25	24.00	26.10	32.00
26	25.00	27.10	33.00
27	26.00	28.10	34.00
28	27.00	29.10	35.00
29	28.00	30.10	36.00
30	29.00	31.10	37.00
31	30.00	32.10	38.00
32	31.00	33.10	39.00
33	32.00	34.10	40.00
34	33.00	35.10	41.00
35	34.00	36.10	42.00

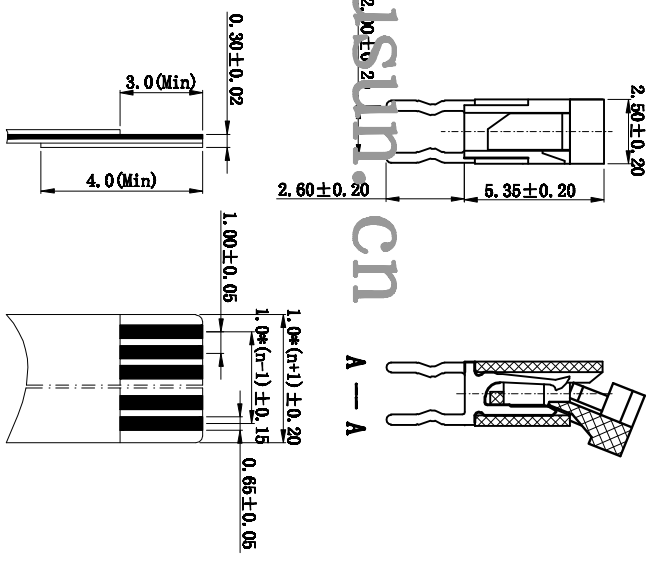

性能:

- 额定电流: 0.5A
- 额定电压: 50V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -20℃~+85℃
- 镀层(材质): LCP, UL94V-0
- 基座(材质): LCP, UL94V-0
- 插簧(材质): 磷青铜, 镀锡
- 薄片(材质): 磷青铜, 镀锡

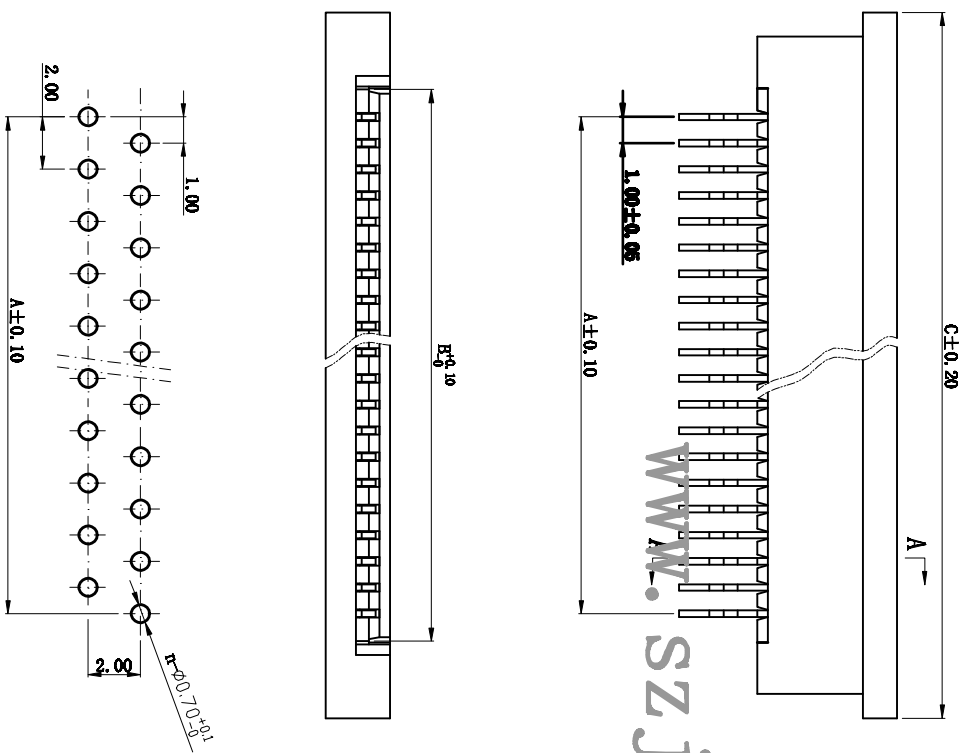

印制电路板  
 $\phi=0.8\sim 1.6$   
 印制电路板公差:  $\pm 0.05\text{mm}$

**JOSUN** 钜赛实业(深圳)有限公司  
 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

PART NO.: 1.0S-12-TP  
 CUS PART NO.:

L ±	L' ±	MAT'L	APPD:
.I ± 0.20	.I' ± 0.1'	/	
.XI ± 0.10	.XI' ± 0.05'	FINISH	CHGD:
.XII ± 0.05	.XII' ±	/	

DATE	VERSION
2017.04.12	VI.0
SCALE	SHEET
1:1	1/1
DR:	REV.
	XI

