
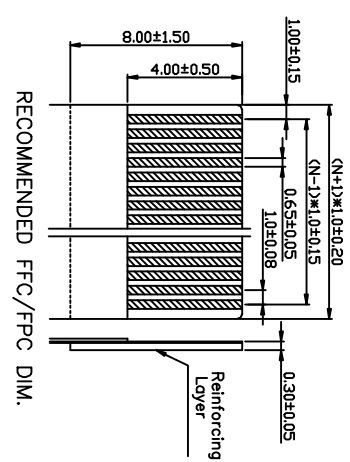

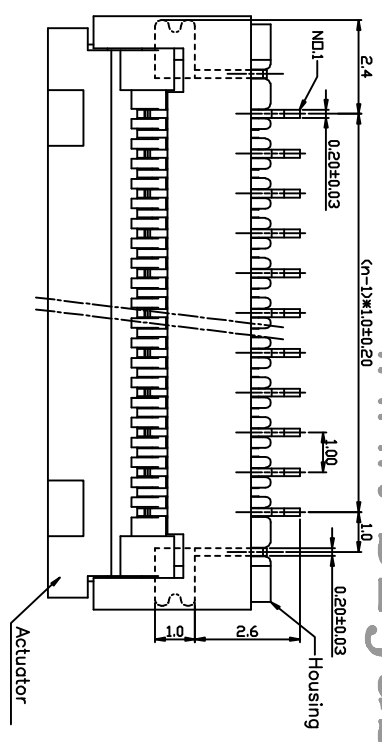
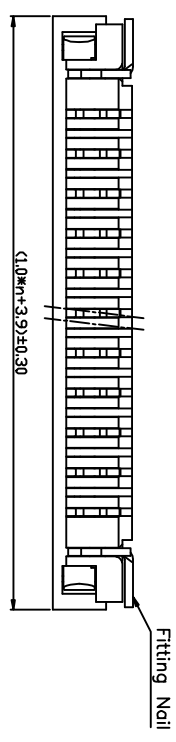



| REV | DESCRIPTION | MARK |
|-----|---------------|------|
| XI | First edition | |

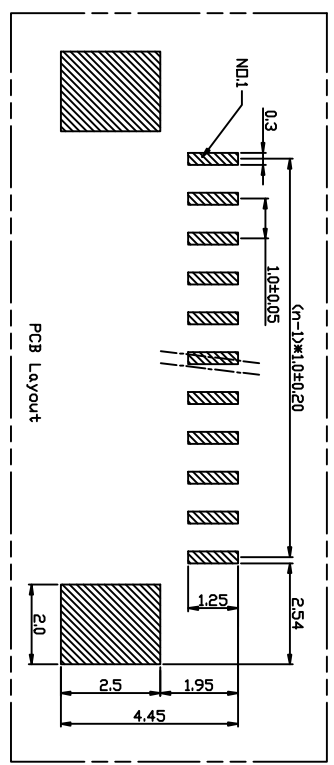

www.szjusun.cn

Electrical Characteristics:

- Current rating: 0.4A AC/DC
 - Voltage rating: 50V AC/DC
 - Temperature range: -25°C~+85°C
 - Withstand Voltage: 200V AC/Minute
 - Contact Resistance: ≤ 20mΩ
 - Insulation resistance: ≥ 500mΩ
 - Relative Humidity: 93%+40°C
- Material Description:
- Terminal: Phosphor Bronze Tin-Leadplated
 - Fitting Nail: Brass Tin-plated
 - Housing: Thermoplastic(UL94V-0)
 - Actuator: Thermoplastic(UL94V-0)

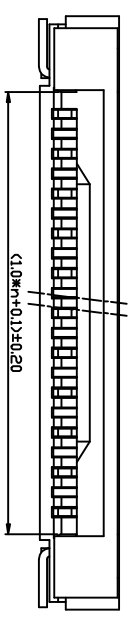

- NOTES:
1. PLASTIC BURRS 0.1mm MAX
 2. PART NO. SPECIFICATION: 10S-2X-nPWB
- FRONT FLIP LOWER CONTACT
- HOUSING LOCK
- PITCH
- SMT
- HORIZONTAL TYPE
- NO. OF CONTACT CODE

| | | | | | |
|--|--------------|-----------|--------|---------------|------------|
| 巨赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD | | PART NO.: | | 10S-2X-nPWB | |
| | | APPD: | | CIS PART NO.: | |
| L ± | L' ± | MARK | FINISH | CHGD: | DATE |
| .I ± 0.20 | .I' ± 0.1' | — | — | — | 2017.08.17 |
| .IX ± 0.10 | .IX' ± 0.05' | — | — | — | VERSION |
| .IIX ± 0.05 | .IIX' ± | — | — | — | V1.0 |
| UNITS: | UNITS: | DR: | DR: | SCALE | SHEET |
| MM | MM | — | — | 1:1 | 1/1 |
| | | | REV. | XI | |