
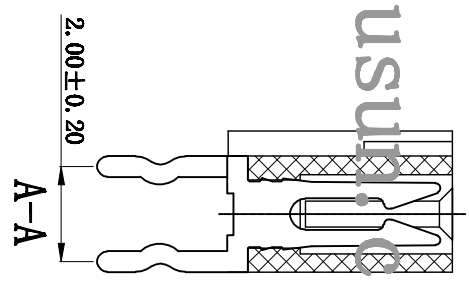
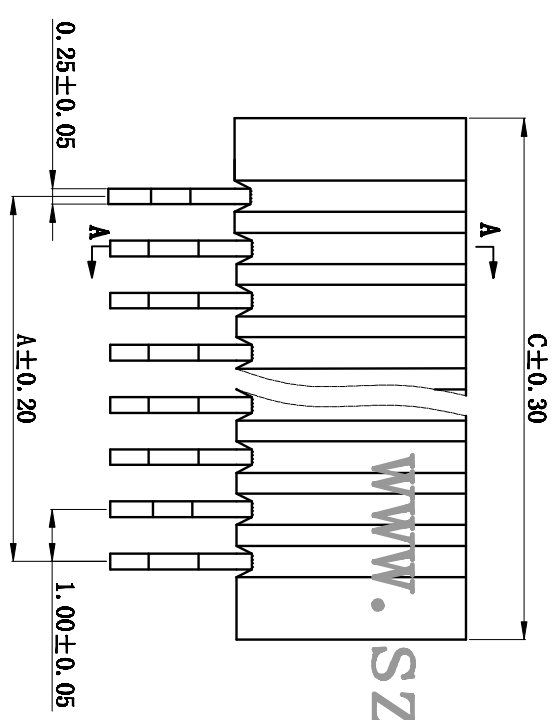
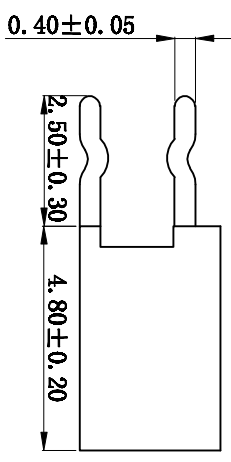



REV	DESCRIPTION	MARK
XI	First edition	

No. of Contacts	DIMENSIONS		
	DIM A	DIM B	DIM C
04	3.00	5.20	6.20
05	4.00	6.20	7.20
06	5.00	7.20	8.20
07	6.00	8.20	9.20
08	7.00	9.20	10.20
09	8.00	10.20	11.20
10	9.00	11.20	12.20
11	10.00	12.20	13.20
12	11.00	13.20	14.20
13	12.00	14.20	15.20
14	13.00	15.20	16.20
15	14.00	16.20	17.20
16	15.00	17.20	18.20
17	16.00	18.20	19.20
18	17.00	19.20	20.20
19	18.00	20.20	21.20
20	19.00	21.20	22.20
21	20.00	22.20	23.20
22	21.00	23.20	24.20
23	22.00	24.20	25.20
24	23.00	25.20	26.20
25	24.00	26.20	27.20
26	25.00	27.20	28.20
27	26.00	28.20	29.20
28	27.00	29.20	30.20
29	28.00	30.20	31.20
30	29.00	31.20	32.20
31	30.00	32.20	33.20
32	31.00	33.20	34.20
33	32.00	34.20	35.20
34	33.00	35.20	36.20
35	34.00	36.20	37.20
36	35.00	37.20	38.20

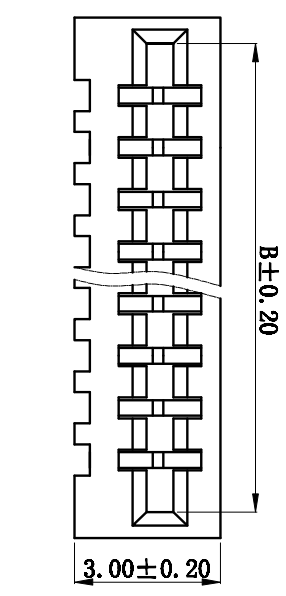

性能:
 额定电流: 0.5A
 额定电压: 50V
 耐电压: 500V
 接触电阻: 30mΩ
 绝缘电阻: 500MΩ
 工作温度: -20℃~+85℃

塑件(材质): PA46, UL94V-0
 插簧(材质): 磷青铜, 镀锡

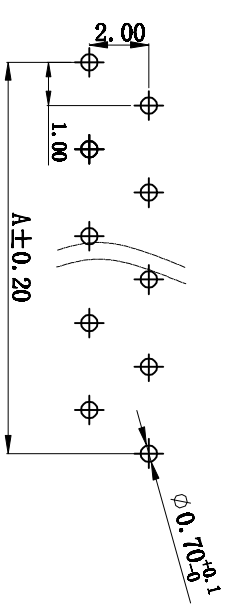

PCB Layout

JUSUN 矩赛实业(深圳)有限公司
 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

K ±	K' ±	MAT'L	APPD:	PART NO.:	1.0-2B3-nP
.X ± 0.30	.X' ± 0.1'			CIS PART NO.:	
.X ± 0.10	.X' ± 0.05"	FINISH	CHGD:	DATE	2016.07.04
.XX ±	.XX' ±		DR:	VERSION	VI.0
UNIT: mm	UNIT: mm	Q'TY		SCALE	1:1
				SHEET	1/1
				REV.	XI