
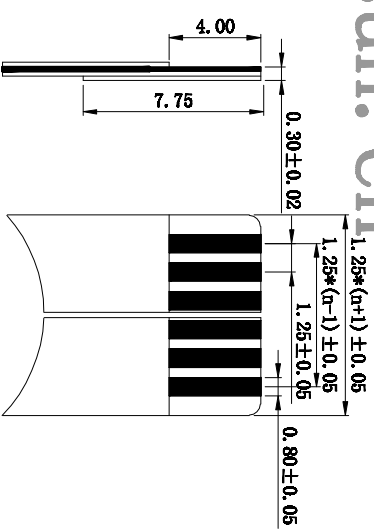
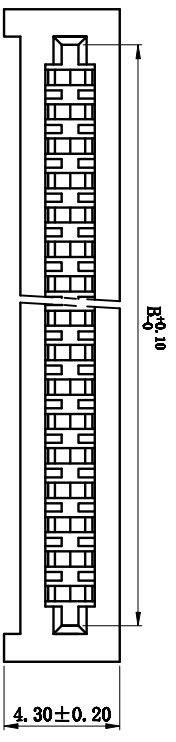
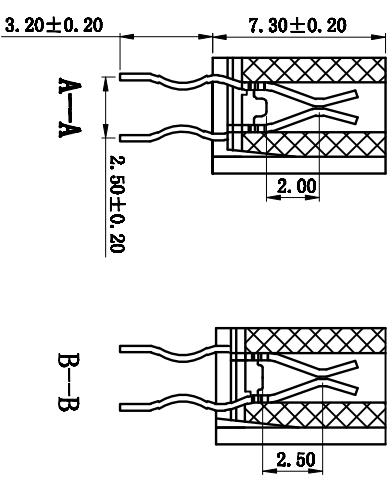


REV	DESCRIPTION	MARK
XI	First edition	


**性能:**

- 额定电流: 1.0A
- 额定电压: 200V
- 耐电压: 500V
- 绝缘电阻: 500M $\Omega$
- 接触电阻: 30m $\Omega$
- 工作温度: -25℃~+85℃

零件(材质): PA46, UL94V-0黑色,  
铜簧(材质): 磷青铜, 镀锡;

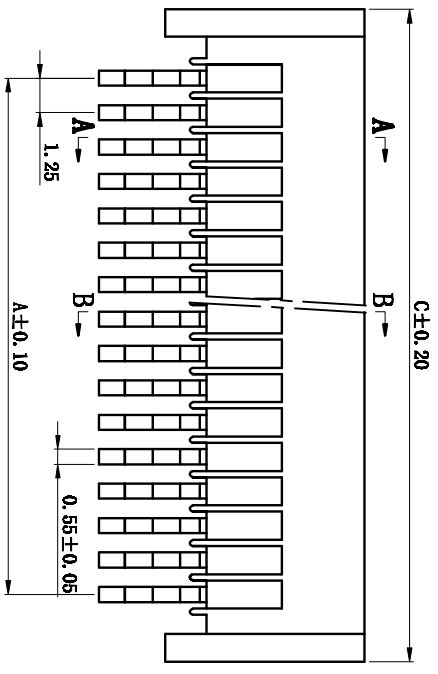

扁平电缆

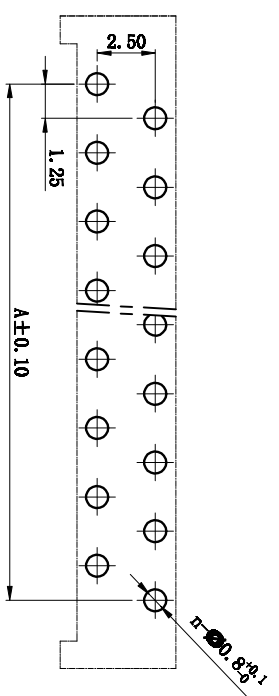

PCB Layout

孔位	A	B	C
3	2.50	5.00	7.30
4	3.75	6.25	8.55
5	5.00	7.50	9.80
6	6.25	8.75	11.05
7	7.50	10.00	12.30
8	8.75	11.25	13.55
9	10.00	12.50	14.80
10	11.25	13.75	16.05
11	12.50	15.00	17.30
12	13.75	16.25	18.55
13	15.00	17.50	19.80
14	16.25	18.75	21.05
15	17.50	20.00	22.30
16	18.75	21.25	23.55
17	20.00	22.50	24.80
18	21.25	23.75	26.05
19	22.50	25.00	27.30
20	23.75	26.25	28.55
21	25.00	27.50	29.80
22	26.25	28.75	31.05
23	27.50	30.00	32.30
24	28.75	31.25	33.55
25	30.00	32.50	34.80
26	31.25	33.75	36.05
27	32.50	35.00	37.30
28	33.75	36.25	38.55
29	35.00	37.50	39.80
30	36.25	38.75	41.05

**JUSUN** 炬赛实业(深圳)有限公司  
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

USR: MAT'L  
FINISH  
Q'TY  
DR:

TITLE: 1.25-3-nP  
CIS PART NO.:

SCALE 1:1	SHEET 1/1	REV. XI
DWG NO.:		
APPRO:		
DESIGN:		

www.szjusun.cn