
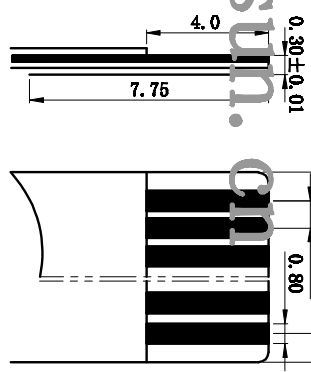
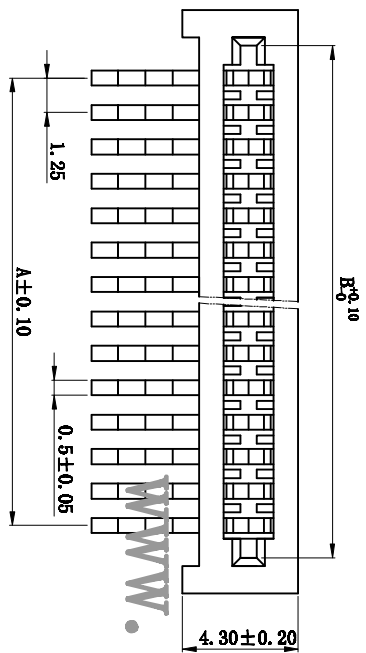




REV	DESCRIPTION	MARK
XI	Latest edition	


性能:

- 额定电流: 1.0A
- 额定电压: 200V
- 耐压: 500V
- 绝缘电阻: 500MΩ
- 接触电阻: 30mΩ
- 工作温度: -25℃~+85℃

零件 (材质): P446, UL94V-0黑色;
插簧 (材质): 磷青铜, 镀锡;

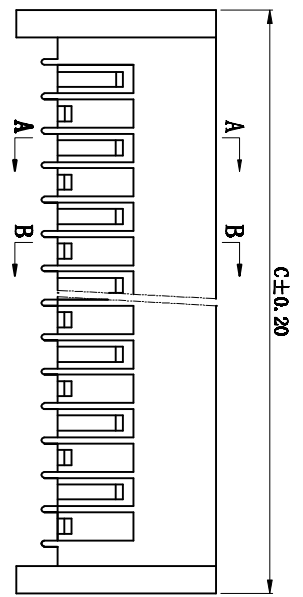

请插入导线
(PROPER
CABLE)

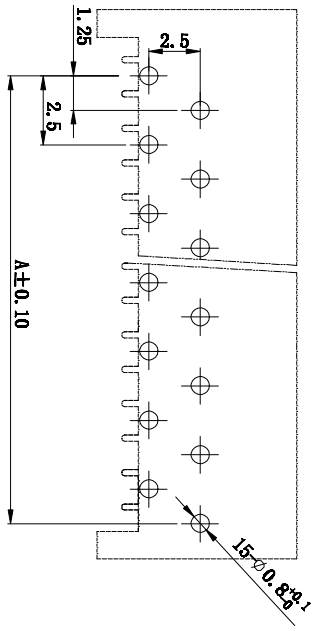

孔位	A	B	C
3	2.50	5.00	7.30
4	3.75	6.25	8.55
5	5.00	7.50	9.80
6	6.25	8.75	11.05
7	7.50	10.00	12.30
8	8.75	11.25	13.55
9	10.00	12.50	14.80
10	11.25	13.75	16.05
11	12.50	15.00	17.30
12	13.75	16.25	18.55
13	15.00	17.50	19.80
14	16.25	18.75	21.05
15	17.50	20.00	22.30
16	18.75	21.25	23.55
17	20.00	22.50	24.80
18	21.25	23.75	26.05
19	22.50	25.00	27.30
20	23.75	26.25	28.55
21	25.00	27.50	29.80
22	26.25	28.75	31.05
23	27.50	30.00	32.30
24	28.75	31.25	33.55
25	30.00	32.50	34.80
26	31.25	33.75	36.05
27	32.50	35.00	37.30
28	33.75	36.25	38.55
29	35.00	37.50	39.80
30	36.25	38.75	41.05

JUSUN 巨赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

TITLE: 1.25-3-nPW
CIS PART NO.:

USR: MAT'L
FINISH
UNIT: mm

APPRO: DR:
CREO:

DWG NO.: SCALE 1:1
SHEET 1/1
REV. XI

