


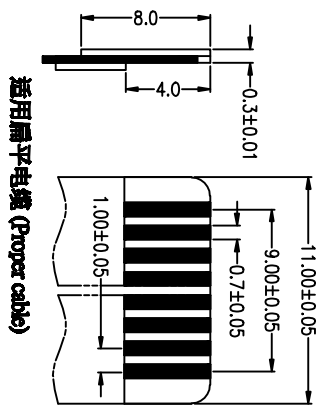

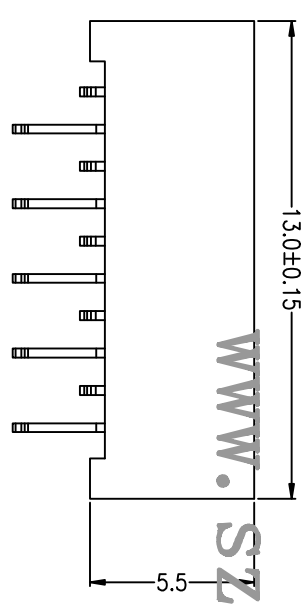



REV	DESCRIPTION	DATE
XI	First edition	

■ 技术参数 (SPECIFICATIONS)

- ◆ 规格: 4-40 Pole: 4-40
- ◆ 额定电压: AC/DC 200V (SHEZ/有效值)
- ◆ 额定电压: AC/DC 50V (200HZ)
- ◆ 额定电流: 0.5A AC/DC
- ◆ Current rating: 0.5A AC/DC
- ◆ 额定电压: 500V AC/minute
- ◆ Withstand voltage: 500V AC/minute
- ◆ 工作温度: -25°C~+85°C
- ◆ 绝缘电阻: >800 MΩ
- ◆ Insulation resistance: >800 MΩ
- ◆ 接触电阻: < 0.02 Ω
- ◆ Contact resistance: < 0.02 Ω
- ◆ X1面接触: Dual Contact
- ◆ 接触件 (TERMINAL)
- ◆ 材质: 磷青铜 Material: Phosphor Bronze
- ◆ 塑胶本体 (HOUSING)
- ◆ 材质: 尼龙·UL 94V-0 Material: Nylon, UL94V-0
- ◆ 包装方式 (PACKAGE)
- ◆ 管接 Pipe Package
- ◆ 盒装 Box Package

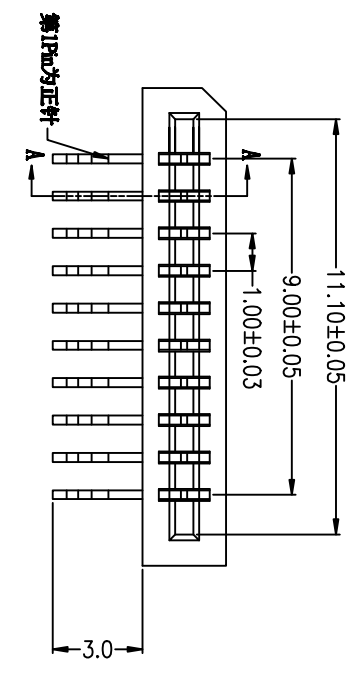

**JUSUN** 炬赛实业(深圳)有限公司  
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

TITLE: 1.25-E-nPW

K ±	K' ±	MAT'L	USE:
.I ± 0.30	.I' ±		
.X ± 0.10	.X' ±	FINISH	APPD:
.XX ±	.XX' ±		CHEK:
UNITS: mm	Q'TY	DR:	

PART NO.:

DWG NO.:

SCALE 1:1

SHEET 1/1

REV. XI

WWW.SZJUSUN.COM