
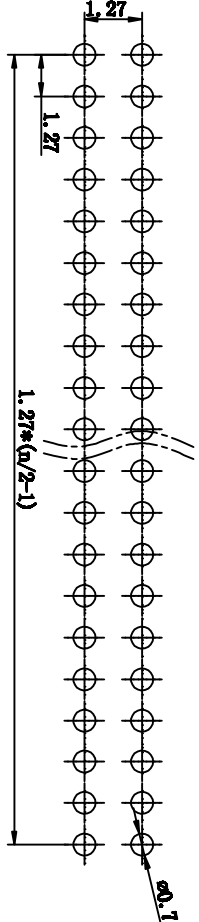

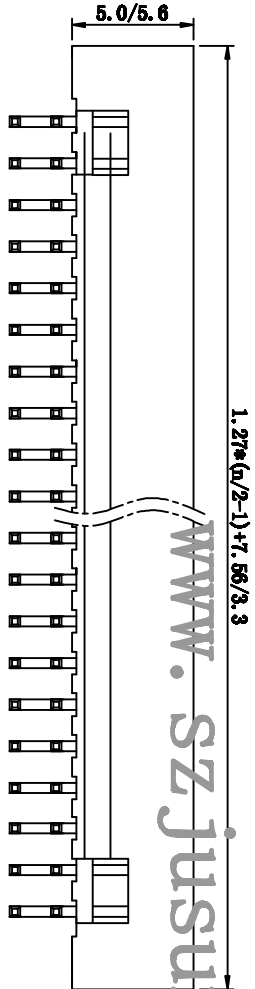


REV	DESCRIPTION	MARK
XI	First edition	

技术要求:

- 零件表面要求平整光滑无毛刺, 无明显盲孔, 划痕, 斑点, 花紋, 油污, 縮水, 毛边, 变形或孔位偏斜等;
- 规格: 额定电压: 100VDC/AC;
额定电流: 1.0A/Max;
耐压值: 500VAC;
工作温度: -40°C ~ +105°C;
接触电阻: 20mΩ /Max;
绝缘电阻: 1000MΩ;
3. 材质: 塑胶: PBT UL94V-0 (Black);
插簧: 黄铜 镀金.

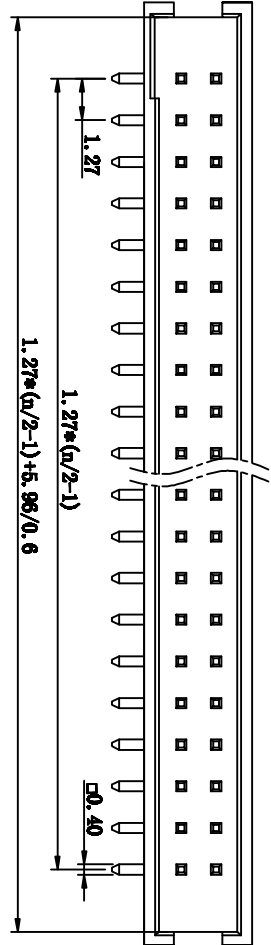

P.C.B Layout

WWW.SZJUSUN.CN

JUSUN 鉅賽实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

L ±	L' ±	MAT'L	APPD:	PART NO.:	筒牛1.27-2XnAW
.I ± 0.05	.I' ± 0.1'	/	/	CIS PART NO.:	
.II ± 0.10	.II' ± 0.05°	FINISH	CHD:	DATE	2016.12.03
.III ±	.III' ±	/	DR:	VERSION	VL.0
UNITS:	UNITS:	Q'TY	DR:	SCALE	1:1
				SHEET	1/1
				REV.	XI