
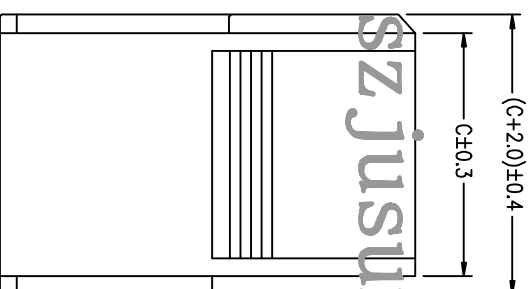


| Poles | Part No | Dimension(mm) |        |          |           |
|-------|---------|---------------|--------|----------|-----------|
|       |         | A             | B      | C        | D         |
| 2     | EL-2A   | 45            | 0      | 5.6      | 10.3      |
| 3     | EL-3A   | 9.0           | 0      | 5.6      | 14.8      |
| 4     | EL-4A   | 13.5(4.5)     | 0(4.5) | 5.6(0.3) | 19.3(0.3) |
| 6     | EL-6A   | 9.0           | 4.5    | 9.9      | 14.8      |
| 9     | EL-9A   | 9.0           | 9.0    | 14.6     | 14.8      |
| 12    | EL-12A  | 13.5          | 9.0    | 14.6     | 19.3      |
| 15    | EL-15A  | 18.0          | 9.0    | 14.6     | 23.8      |

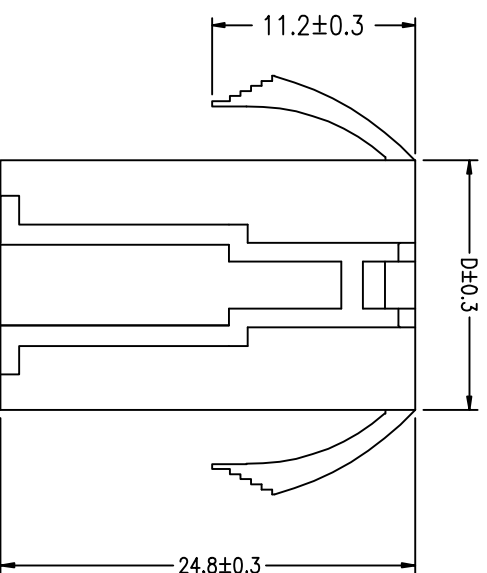

www.szjusun.cn

### 技术参数 SPECIFICATIONS

- ◆ 间距: 4.5 Pitch: 4.5
- ◆ 适用线规: AWG#24-#16  
Applicable Wire: AWG#24-#16
- ◆ 额定电压: AC,DC,300V(有效值)  
Voltage rating: AC,DC,300V(rms)
- ◆ 额定电流: 6.0-10.0A  
Current rating: 6.0-10.0A
- ◆ 耐压值: 1500V AC/minute  
Withstand voltage: 1500V AC/minute
- ◆ 工作温度: -25℃~+85℃  
Working Temperature: -25℃~+85℃
- ◆ 绝缘电阻: ≥1000 MΩ  
Insulation resistance: ≥1000MΩ
- ◆ 接触电阻: ≤0.015 Ω  
Contact resistance: ≤0.015 Ω
- ◆ 适用印制板厚度: 1.6-2.0mm  
Applicable PC board thickness: 1.6-2.0mm

### 材料 MATERIAL

- ◆ 绝缘座: 尼龍 UL94-0  
Housing: Nylon UL94-0
- ◆ 端子: 磷青銅  
Terminal: Phosphor bronze

|  |         |                   |         |       |      |                    |                         |          |   |       |  |      |  |
|--|---------|-------------------|---------|-------|------|--------------------|-------------------------|----------|---|-------|--|------|--|
| <br><b>聚善实业(深圳)有限公司</b><br>JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD |         | GENERAL TOLERANCE |         | SCALE |      | DRAWN              |                         | DWG. NO. |   | TITLE |  | REV. |  |
|  |         | XX. ± 0.40        | XXX. ±  | 1     | 1=1  | DATE               | G:\DWG\Production\EL-nA | 塑膠图      | A |       |  |      |  |
| X. ± 0.25  | .XXX ±  | UNIT              | MM      | CHECK | DATE | PARTS NO.<br>EL-nA | SHEET<br>1/1            |          |   |       |  |      |  |
| X. ± 0.15  | X. ± 2' | SIZE              | APPROVE | DATE  |      |                    |                         |          |   |       |  |      |  |
| .XX ± 0.10   | X' ± 1' |                   |         |       |      |                    |                         |          |   |       |  |      |  |