

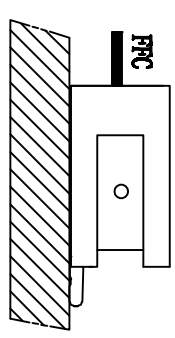
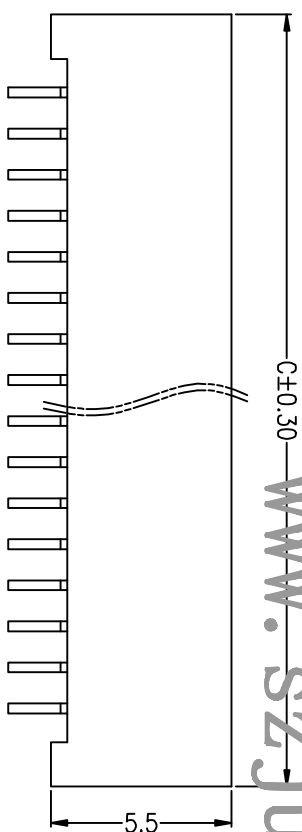

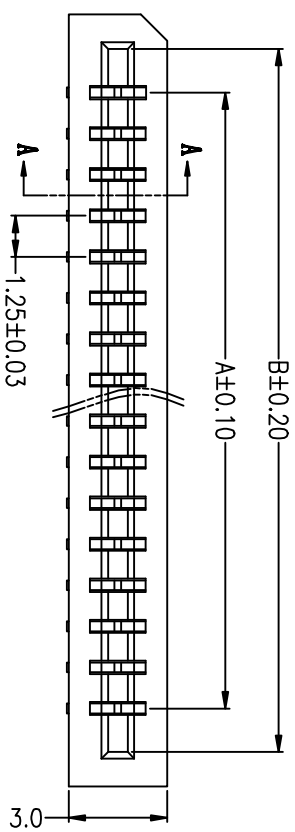


| Pin No. | A | B | C |
|---------|-------|-------|-------|
| 4P | 3.75 | 6.40 | 8.50 |
| 5P | 5.00 | 7.65 | 9.75 |
| 6P | 6.25 | 8.90 | 11.00 |
| 7P | 7.50 | 10.15 | 12.25 |
| 8P | 8.75 | 11.40 | 13.50 |
| 9P | 10.00 | 12.65 | 14.75 |
| 10P | 11.25 | 13.90 | 16.00 |
| 11P | 12.50 | 15.15 | 17.25 |
| 12P | 13.75 | 16.40 | 18.50 |
| 13P | 15.00 | 17.65 | 19.75 |
| 14P | 16.25 | 18.90 | 21.00 |
| 15P | 17.50 | 20.15 | 22.25 |
| 16P | 18.75 | 21.40 | 23.50 |
| 17P | 20.00 | 22.65 | 24.75 |
| 18P | 21.25 | 23.90 | 26.00 |
| 19P | 22.50 | 25.15 | 27.25 |
| 20P | 23.75 | 26.40 | 28.50 |
| 21P | 25.00 | 27.65 | 29.75 |
| 22P | 26.25 | 28.90 | 31.00 |
| 23P | 27.50 | 30.15 | 32.25 |
| 24P | 28.75 | 31.40 | 33.50 |
| 25P | 30.00 | 32.65 | 34.75 |
| 26P | 31.25 | 33.90 | 36.00 |
| 27P | 32.50 | 35.15 | 37.25 |
| 28P | 33.75 | 36.40 | 38.50 |
| 29P | 35.00 | 37.65 | 39.75 |
| 30P | 36.25 | 38.90 | 41.00 |
| 31P | 37.50 | 40.15 | 42.25 |
| 32P | 38.75 | 41.40 | 43.50 |
| 33P | 40.00 | 42.65 | 44.75 |
| 34P | 41.25 | 43.90 | 46.00 |
| 35P | 42.50 | 45.15 | 47.25 |
| 36P | 43.75 | 46.40 | 48.50 |
| 37P | 45.00 | 47.65 | 49.75 |
| 38P | 46.25 | 48.90 | 51.00 |
| 39P | 47.50 | 50.15 | 52.25 |
| 40P | 48.75 | 51.40 | 53.50 |

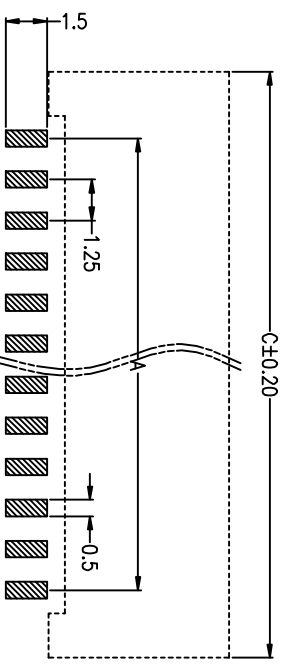

安装示意图

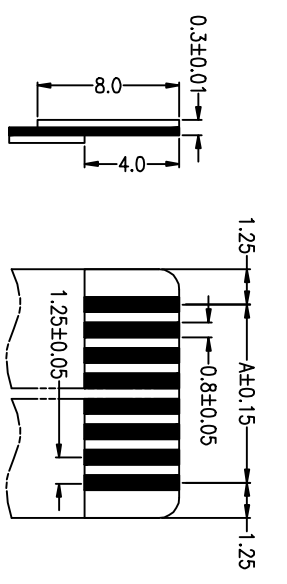

适用扁平电缆 (Proper cable)

PCB 寸法 (PCB layout)

| REV | DESCRIPTION | DATE |
|-----|---------------|------|
| XI | First edition | |

- 技术参数 (SPECIFICATIONS)
 - ◆ 极数: 4-40 Poles: 4-40
 - ◆ 额定电压: AC/DC 200V (50/60HZ有效值)
 - ◆ 电压额定值: AC/DC 50V (200HZ)
 - ◆ 额定电流: 0.5A AC/DC
 - ◆ 电流额定值: 0.5A AC/DC
 - ◆ 耐压值: 500V AC/minute
 - ◆ Withstand voltage: 500V AC/minute
 - ◆ 工作温度: -25°C~+85°C
 - ◆ Working Temperature: -25°C~+85°C
 - ◆ 绝缘电阻: >800 MΩ
 - ◆ Insulation resistance: >800 MΩ
 - ◆ 接触电阻: ≤ 0.02 Ω
 - ◆ Contact resistance: ≤ 0.02 Ω
 - ◆ 双重接触: Dual Contact
 - ◆ 接触件 (TERMINAL)
 - ◆ 材质: 磷青铜
 - ◆ Material: Phosphor Bronze
 - ◆ 塑胶本体 (HOUSING)
 - ◆ 材质: 尼龙9T、UL 94V-0
 - ◆ Material: Nylon, UL94V-0
 - ◆ 包装方式 (PACKAGE)
 - ◆ 管装: Pipe Package
 - ◆ 盒装: Box Package

JUSUN 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

| | | |
|-----------|--------|----|
| 尺寸 | 公差 | 单位 |
| L ± | L' ± | mm |
| .I ± 0.30 | .I' ± | |
| .X ± 0.10 | .X' ± | |
| .XX ± | .XX' ± | |

USE: MAT'L
FINISH
APPD:
CHKD:
DR:

TITLE: 1.25-E-nPWB
PART NO.:

SCALE: 1:1
SHEET: 1/1
REV: XI

WWW.SZJUSUN.CN